


SPECIFICATIONS

- CERTIFICATIONS** The fixture shall be ETL and CETL listed "suitable for wet locations."
- HOUSING AND HARDWARE** The housing globe holder is constructed of cast aluminum with twist-lock fitter. The ballast housing is spun aluminum. All external hardware is stainless steel to resist corrosion. The finial is of non-ferrous metal and is gasketed where it meets the top of the globe.
- GLOBE** The Design AC fixture's globe is clear (standard) or white textured polycarbonate material.
- INSTALLATION** The luminaire shall mount on a 3" O.D. tenon with six 1/4" dia. socket set screws. The globe shall be secured to the luminaire by four 1/4" dia. socket set screws. The ballast and socket assembly shall be furnished with a quick disconnect plug and mount on a removable ballast plate. The ballast plate shall be removable by loosening two screws. A strain relief shall be provided in the luminaire below the quick disconnect plug to hold post wires in place.
- BALLAST** Design AC fixtures come with either an H.I.D. ballast and socket assembly or an incandescent socket. Ballast shall be core and coil, high power factor, regulating type.
- FINISH** Polyester powder coat, electrostatically applied, which is preceded by a five step pre-treatment process including an iron phosphate priming stage for superior coating adhesion. This process meets or exceeds all ASTM testing requirements, including those for 1000 - hour salt spray endurance testing.

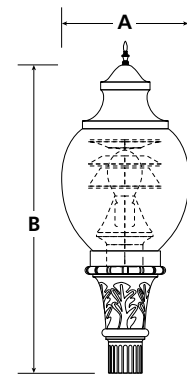

DIMENSIONS
A 16.00" Dia. (406.40 mm)
B 37.00" (939.80 mm)

EFFECTIVE PROJECTED AREA (EPA) 1.7 sq. ft. (.10M2)
WEIGHT 21 lbs. (9.98 kgs)

Quality Lighting[™]

Quality Lighting is a Philips group brand

2930 South Fairview Street
Santa Ana, CA 92704
Phone (714) 371-2394 • FAX (714) 668-1107
Toll Free Phone (800) 545-1326
e-mail: sales@qualitylighting.com • www.qualitylighting.com
Specifications subject to change without notice. ©2007 Quality Lighting

Quality Lighting[™]



DECORATIVE/POST-TOP

DESIGN-AC



DISTRIBUTIONS

TYPE V Symmetrical (Vert. Lamp)

ORDERING EXAMPLE AC-V-HPS-175-BK-120-T2-FD-HSS-FN

MH = Std. Metal Halide
MHP = Pulse Start

DESIGN	DISTRIBUTION	HPS	MH/MHP	LPS	LAMP
AC	V	35/50/70/100/150/250	50/70/100/150/175*/250	35/55	E-17 ED-18 ED-28 T-17

*175W is Standard MH

REQUIRED CHOICES

FINISH

BK Black	WH White	GR Green	FG Gray	DB Bronze	SL Silver	CC Custom
----------	----------	----------	---------	-----------	-----------	-----------

Supply Color Chip

VOLTAGES

- 120
- 208
- 240
- 277
- 347

OPTIONAL CHOICES

ELECTRICAL OPTIONS

- FD Single Fusing 120V/277V
- FD FD Double Fusing 208V/240V
- FDC Single Fusing 347V

OPTICAL OPTIONS

- CLF5 Type 5 Refractor
- CLF3 Type 3 Refractor

OPTIONS

- HSS 120° Rotatable Cut-off Shield (House Side)
- FN Finial
- PCB Button Photo Control