


Quality Lighting™



DECORATIVE POST-TOP

ALPV Series

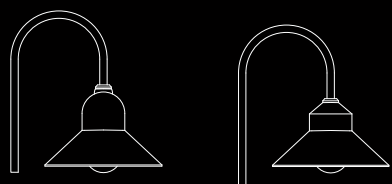

FIXTURE

MOUNTING ACCESSORY

ORDERING EXAMPLE ALPV24C-150-CT-S-120-BLK

AM24ISF3-BLK

SERIES/SIZE/SOURCE-WATTAGE	STYLE	DISTRIBUTION	VOLTAGE ²	FINISH ³	MOUNTING ACCESSORIES*	FINISH ³
ALPV21C-70	Ceramic Metal Halide	CT	120	BLK	21" Mounting Accessories AM21ISF3	24" Mounting Accessories AM24ISF3
ALPV24C-150	(E) DT	3H ¹	208	DB		
ALPV21P-100	Pulse Start Metal Halide	5H ¹	240	WHT	AM21ISF4	AM24ISF4
ALPV24P-150	(E)		277	GN	AM21ESF3-2180	AM24ESF3-2180
ALPV21S-70	High Pressure Sodium			SA	AM21ESF3-3120	AM24ESF3-3120
ALPV24S-150				GR	AM21ESF3-490	AM24ESF3-490
ALPV21CF-13	Compact Fluorescent			RAL(*)	WB21	WB24
ALPV21CF-26					P(X) ⁴	P(X) ⁴
ALPV21CF-42						

* SELECTION REQUIRED
Mounting accessories must be ordered and shipped separately.


SERIES/SIZE/SOURCE-WATTAGE	STYLE	DISTRIBUTION	VOLTAGE ²	FINISH ³	MOUNTING ACCESSORIES*
Ceramic Metal Halide	<input type="checkbox"/> CT Conical Top <input type="checkbox"/> DT Dome Top	<input type="checkbox"/> S Symmetrical Opal Acrylic <input type="checkbox"/> 3H ¹ DarkSky Type 3 Reflector <input type="checkbox"/> 5H ¹ DarkSky Type 5 Reflector	<input type="checkbox"/> 120 <input type="checkbox"/> 208 <input type="checkbox"/> 240 <input type="checkbox"/> 277	<input type="checkbox"/> BLK Black <input type="checkbox"/> DB Dark Bronze <input type="checkbox"/> WHT White <input type="checkbox"/> GN Green <input type="checkbox"/> SA Satin Aluminum <input type="checkbox"/> GR Gray <input type="checkbox"/> RAL(*) Custom Color (*Specify RAL #)	<input type="checkbox"/> AM(**)ISF3 Single Arm Mount (Internally slip fits a 3" O.D. pole) <input type="checkbox"/> AM(**)ISF4 Single Arm Mount (Internally slip fits a 4" O.D. pole) <input type="checkbox"/> AM(**)ESF3-2180 2 @ 180° Pole Adaptor (Externally slip fits a 3" O.D. pole) <input type="checkbox"/> AM(**)ESF3-3120 3 @ 120° Pole Adaptor (Externally slip fits a 3" O.D. pole) <input type="checkbox"/> AM(**)ESF3-490 4 @ 90° Pole Adaptor (Externally slip fits a 3" O.D. pole) <input type="checkbox"/> WB(**) Wall Bracket <input type="checkbox"/> P(X) ⁴ Pendant Mount
Pulse Start Metal Halide					
High Pressure Sodium					
Compact Fluorescent					

NOTE: E17 Lamps are medium base
CF13= single biax, CF26= double biax, CF42= Triple biax


NOTES
1. 21" housing Only.
2. Consult factory for other voltages.
3. Baked enamel paint standard, powdercoat is available on request.
4. Specify pendant length in inches (X).

MOUNTING DIMENSIONS

ARM MOUNT SINGLE AM(**)ISF3/ISF4

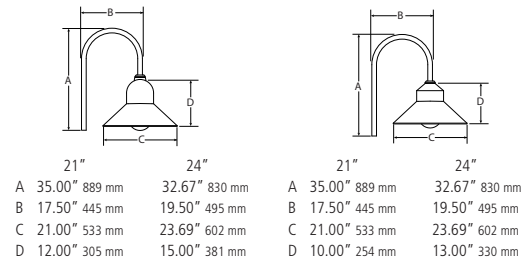


PENDANT MOUNT P(X)

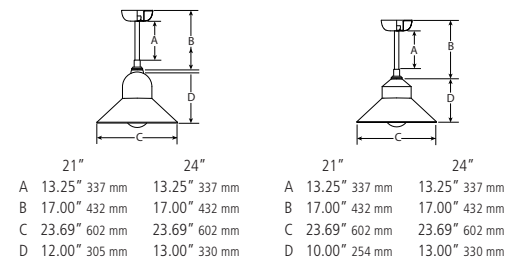


EPA (sq ft)	D21	D24	C21	C24
Arm Mount (single)	0.88	1.31	0.81	1.22
Arm Mount (2@180)	2.32	3.18	2.18	3.00
Pendant Mount	1.03	1.46	0.96	1.37
Wall Mount	1.21	1.64	1.14	1.55

ARM MOUNT 2 @ 180° AM(**)ESF3-2180

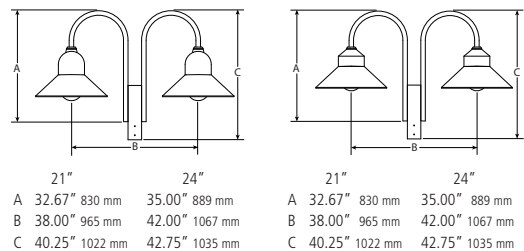

WALL BRACKET WB21, WB24

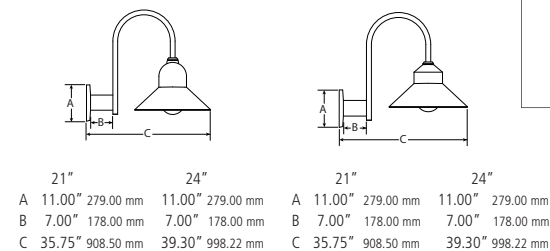

WEIGHT (lbs)	D21	D24	C21	C24
Arm Mount (single)	29	53	22	46
Arm Mount (2@180)	68	116	54	102
Pendant Mount	32	56	25	49
Wall Mount	35	59	28	52

SPECIFICATIONS



- HOUSING** The housing shall be constructed of heavy duty cast aluminum with a minimum 0.188" wall thickness.
- SHADE** The shade shall be constructed of heavy duty cast aluminum with a minimum 0.188" wall thickness.
- MOUNTING DETAIL** The single fixture arm shall internally slip fit a 3" or 4" O.D. pole. Consult Factory for other pole sizes.
The Arm Mount (AM) brackets shall externally slip fit a 3" O.D. pole. Consult Factory for other pole sizes.
The pendant mounted option (P) is supported by an aluminum pipe 1" O.D. (specify length) with a hang straight bracket (max. 25° slope) attached with two 0.38" bolts on a 5.75" bolt circle and a canopy for mounting over a recessed 4" square junction box.
- BALLAST** The ballast shall be readily accessible, removable and insulated. The fixture is to be pre-wired and electronically tested before shipment.
- LENS** The lens shall be opal acrylic for symmetric light distribution.
- LAMP HOLDER** The standard lamp holder shall be 4KV pulse rated medium base, for HID lamp sources.
- HARDWARE** All exposed hardware shall be stainless steel.
- FINISH** Black (BLK), Dark Bronze (DB), White (WHT), Green (GN), Gray (GR) and Satin Aluminum (SA) baked enamel paint standard. Powder coat and custom colors available on request.
- CERTIFICATIONS** ETL and CETL listed for wet location. Meets IP65 standard.
- WARRANTY** Mechanical, finish and electrical shall be covered by a limited 1-year warranty. See terms and conditions for details.



Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled 'Contain Mercury' and/or with the symbol 'Hg'. Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycle and disposal can be found at www.lamprecycle.org.

Quality Lighting™

Quality Lighting is a Philips group brand

1611 Clovis Barker Road
San Marcos, Texas 78640
Toll Free Phone (800) 545-1326
FAX (866) 713-6002
www.qualitylighting.com
e-mail: Quality.Info@Philips.com

Quality Lighting reserves the right to change specifications and dimensions without notice. Lamp and electrical specifications / availability subject to change by manufacturer without notice. ©2009 Philips Group

PT#: QLBR0122A0809