

Pedestrian Areas
Walkways
Building Entrances
Parking Lots
Shopping Malls
Landscape Areas



ALPV21-DT / ALPV24-DT



ALPV21-CT / ALPV24-CT

Specifications



- HOUSING** The housing shall be constructed of heavy duty cast aluminum with a minimum 0.188" wall thickness.
- SHADE** The shade shall be constructed of heavy duty cast aluminum with a minimum 0.188" wall thickness.
- MOUNTING DETAIL** The single fixture arm shall internally slip fit a 3" or 4" O.D. pole. Consult Factory for other pole sizes.
 The Arm Mount (AM) brackets shall externally slip fit a 3" O.D. pole. Consult Factory for other pole sizes.
 The pendant mounted option (P) is supported by an aluminum pipe 1" O.D. (specify length) with a hang straight bracket (max. 25° slope) attached with two 0.38" bolts on a 5.75" bolt circle and a canopy for mounting over a recessed 4" square junction box.
- BALLAST** The ballast shall be readily accessible, removable and insulated. The fixture is to be pre-wired and electronically tested before shipment.
- LENS** The lens shall be opal acrylic for symmetric light distribution.
- LAMP HOLDER** The standard lamp holder shall be 4KV pulse rated medium base, for HID lamp sources.
- HARDWARE** All exposed hardware shall be stainless steel.
- FINISH** Black (BLK), Dark Bronze (DB), White (WHT), Green (GN), Gray (GR) and Satin Aluminum (SA) baked enamel paint standard. Powder coat and custom colors available on request.
- CERTIFICATIONS** ETL and CETL listed for wet location. Meets IP65 standard.
- WARRANTY** Mechanical, finish and electrical shall be covered by a limited 1-year warranty. See terms and conditions for details.



Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled 'Contain Mercury' and/or with the symbol 'Hg'. Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycle and disposal can be found at www.lamprecycle.org.

PROJECT
FIXTURE TYPE
CATALOG#

Quality Lighting
 1611 Clovis R. Barker Rd.
 San Marcos, Texas 78666
 Toll Free Phone (800) 545-1326 • FAX (866) 713-6002
 www.qualitylighting.com
 e-mail: Quality.Info@Philips.com

ALPV

ORDERING EXAMPLE **FIXTURE** **MOUNTING ACCESSORY**
 ALPV24C-150-CT-S-120-BLK AM24ISF3-BLK

SERIES/SIZE/SOURCE-WATTAGE	STYLE	DISTRIBUTION	VOLTAGE ²	FINISH ³
ALPV21C-70	Ceramic Metal Halide	CT	120	BLK
ALPV24C-150	(E) DT	3H ¹	208	DB
ALPV21P-100	Pulse Start Metal Halide	5H ¹	240	WHT
ALPV24P-150	(E)		277	GN
ALPV21S-70	High Pressure Sodium			SA
ALPV24S-150				GR
ALPV21CF-13	Compact Fluorescent			RAL(*)
ALPV21CF-26				
ALPV21CF-42				

MOUNTING ACCESSORIES*		FINISH ³
21" Mounting Accessories	24" Mounting Accessories	BLK
AM21ISF3	AM24ISF3	DB
AM21ISF4	AM24ISF4	WHT
AM21ESF3-2180	AM24ESF3-2180	GN
AM21ESF3-3120	AM24ESF3-3120	SA
AM21ESF3-490	AM24ESF3-490	GR
WB21	WB24	RAL(*)
P(X) ⁴	P(X) ⁴	

*** SELECTION REQUIRED**
 Mounting accessories must be ordered and shipped separately.

SERIES/SIZE/SOURCE-WATTAGE	STYLE	DISTRIBUTION	VOLTAGE ²	FINISH ³	MOUNTING ACCESSORIES*
Ceramic Metal Halide	<input type="checkbox"/> CT Conical Top <input type="checkbox"/> DT Dome Top	<input type="checkbox"/> S Symmetrical Opal Acrylic <input type="checkbox"/> 3H ¹ DarkSky Type 3 Reflector <input type="checkbox"/> 5H ¹ DarkSky Type 5 Reflector	<input type="checkbox"/> 120 <input type="checkbox"/> 208 <input type="checkbox"/> 240 <input type="checkbox"/> 277	<input type="checkbox"/> BLK Black <input type="checkbox"/> DB Dark Bronze <input type="checkbox"/> WHT White <input type="checkbox"/> GN Green <input type="checkbox"/> SA Satin Aluminum <input type="checkbox"/> GR Gray <input type="checkbox"/> RAL(*) Custom Color (*Specify RAL #)	<input type="checkbox"/> AM(**)ISF3 Single Arm Mount (Internally slip fits a 3" O.D. pole) <input type="checkbox"/> AM(**)ISF4 Single Arm Mount (Internally slip fits a 4" O.D. pole) <input type="checkbox"/> AM(**)ESF3-2180 2 @ 180° Pole Adaptor (Externally slip fits a 3" O.D. pole) <input type="checkbox"/> AM(**)ESF3-3120 3 @ 120° Pole Adaptor (Externally slip fits a 3" O.D. pole) <input type="checkbox"/> AM(**)ESF3-490 4 @ 90° Pole Adaptor (Externally slip fits a 3" O.D. pole) <input type="checkbox"/> WB(**) Wall Bracket <input type="checkbox"/> P(X) ⁴ Pendant Mount
ALPV21C-70 (T6)	(E)				
ALPV24C-150 (T6)					
Pulse Start Metal Halide					
ALPV21P-100 (E17)	(E)				
ALPV24P-150 (E17)					
High Pressure Sodium					
ALPV21S-70 (E17)					
ALPV24S-150 (E17)					
Compact Fluorescent					
ALPV21CF-13 (CF)					
ALPV21CF-26 (CFQ)					
ALPV21CF-42 (CFT)					

NOTE: E17 Lamps are medium base
 CF13= single biax, CF26= double biax, CF42= Triple biax

NOTES
 1. 21" housing Only.
 2. Consult factory for other voltages.
 3. Baked enamel paint standard, powdercoat is available on request.
 4. Specify pendant length in inches (X).

(**) Specify 21" or 24" housing.
 (X) Specify pendant length in inches.
*** SELECTION REQUIRED.** Mounting accessories must be ordered and shipped separately.


MOUNTING DIMENSIONS

ARM MOUNT SINGLE AM(**)ISF3/ISF4



21"		24"	
A	35.00" 889 mm	32.67" 830 mm	32.67" 830 mm
B	17.50" 445 mm	19.50" 495 mm	19.50" 495 mm
C	21.00" 533 mm	23.69" 602 mm	23.69" 602 mm
D	12.00" 305 mm	15.00" 381 mm	13.00" 330 mm


PENDANT MOUNT P(X)



21"		24"	
A	13.25" 337 mm	13.25" 337 mm	13.25" 337 mm
B	17.00" 432 mm	17.00" 432 mm	17.00" 432 mm
C	23.69" 602 mm	23.69" 602 mm	23.69" 602 mm
D	12.00" 305 mm	13.00" 330 mm	13.00" 330 mm


EPA (sq ft)	D21	D24	C21	C24
Arm Mount (single)	0.88	1.31	0.81	1.22
Arm Mount (2@180)	2.32	3.18	2.18	3.00
Pendant Mount	1.03	1.46	0.96	1.37
Wall Mount	1.21	1.64	1.14	1.55

ARM MOUNT 2 @ 180° AM(**)ESF3-2180

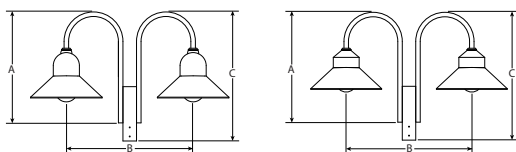

21"		24"	
A	32.67" 830 mm	35.00" 889 mm	35.00" 889 mm
B	38.00" 965 mm	42.00" 1067 mm	42.00" 1067 mm
C	40.25" 1022 mm	42.75" 1035 mm	42.75" 1035 mm

WALL BRACKET WB21, WB24

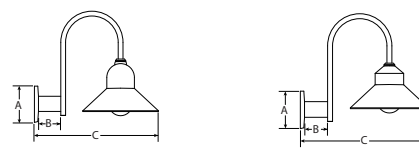

21"		24"	
A	11.00" 279.00 mm	11.00" 279.00 mm	11.00" 279.00 mm
B	7.00" 178.00 mm	7.00" 178.00 mm	7.00" 178.00 mm
C	35.75" 908.50 mm	39.30" 998.22 mm	39.30" 998.22 mm

WEIGHT (lbs)	D21	D24	C21	C24
Arm Mount (single)	29	53	22	46
Arm Mount (2@180)	68	116	54	102
Pendant Mount	32	56	25	49
Wall Mount	35	59	28	52